


Base Pin Mounted Cylinders (Tipping)

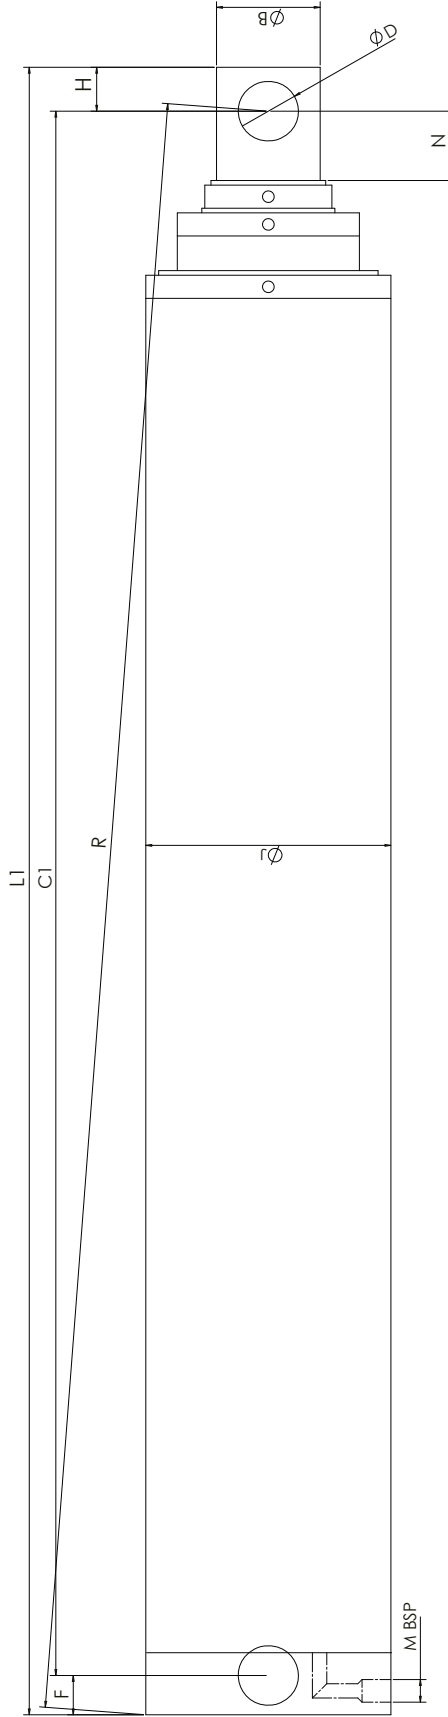

Piston Diameters & Thrust at 100 bar

| Stock Code | Stages | Ø60.30 | 3180kg | Ø69.85 | 3905kg | Ø76.20 | 4650kg | Ø88.90 | 6325kg | Ø95.25 | 7365kg | Ø107.95 | 9330kg | Mass | Oil Vol | Seal Kit Code | ØB (mm) | C1 (mm) | ØD (mm) | F (mm) | H (mm) | N (mm) | ØJ (mm) | L1 | M | R |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|--------|--------|---------|---------------|---------|---------|---------|--------|--------|--------|---------|------|------|------|
| DW265 | 2 | | | ● | | | | | | ● | | | | 24.5kg | 4.5ℓ | DWSK265 | 44.45 | 673 | 25.8 | 20 | 19 | 45 | 105 | 712 | 1/2" | 695 |
| DW345 | 2 | | | ● | | | | | | ● | | | | 31.0kg | 7.6ℓ | DWSK265 | 44.45 | 876 | 25.8 | 20 | 19 | 45 | 105 | 915 | 1/2" | 898 |
| DW365 | 3 | ● | | | | ● | | | | ● | | | | 38.0kg | 9.8ℓ | DWSK365 | 44.45 | 924 | 25.8 | 20 | 19 | 72 | 105 | 963 | 1/2" | 946 |
| DW626C | 2 | | | | | | | ● | | | | ● | | 38.0kg | 8.4 | DWSK626 | 50.80 | 775 | 32.5 | 22 | 22 | 75 | 120 | 819 | 1/2" | 800 |
| DW385 | 2 | | | | | | | ● | | | | ● | | 41.0kg | 10.9ℓ | DWSK626 | 50.80 | 914 | 32.5 | 22 | 22 | 50 | 120 | 958 | 1/2" | 938 |
| DW111C | 3 | | | | | | | ● | | | | ● | | 43.2kg | 18.6ℓ | DWSK1111 | 50.0 | 1245 | 31.75 | 22 | 22 | 109 | 120 | 1289 | 1/2" | 1268 |